


# MBTA93 - 2,5xD


Verktyg för fräsning i ALU/Mässing/Koppar/Plast

- 3-skärig
- Användbar skärlängd 2,5xD
- Allmän fräsning
- MBT Drillpoint
- Vibrationsdämpad

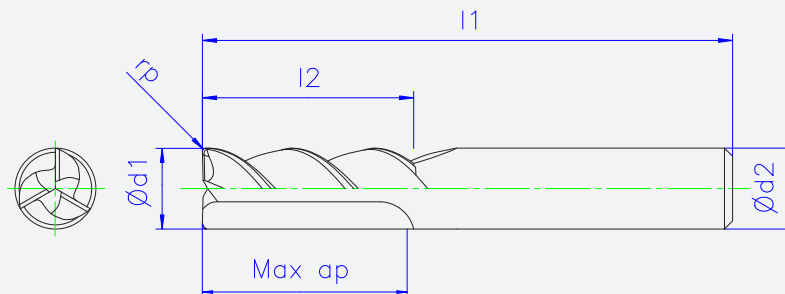

## MBTA93 | Ø2,0-20,0

Art.nr	Ød1h6	Ød2h6	l1	l2	Max ap	rp	z	Info
• MBTA93020010	2,0	4,0	50,0	8,0	8,0	0,10	3	Cyl
• MBTA93025010	2,5	4,0	50,0	11,0	11,0	0,10	3	Cyl
• MBTA93030010	3,0	4,0	50,0	11,0	11,0	0,10	3	Cyl
• MBTA93035010	3,5	4,0	50,0	12,0	12,0	0,10	3	Cyl
• MBTA93040010	4,0	6,0	50,0	12,0	12,0	0,10	3	Cyl
• MBTA93040100	4,0	6,0	50,0	12,0	12,0	1,0	3	Cyl
• MBTA93045010	4,5	6,0	50,0	15,0	15,0	0,10	3	Cyl
• MBTA93050010	5,0	6,0	50,0	15,0	15,0	0,10	3	Cyl
• MBTA93060010	6,0	6,0	50,0	18,0	18,0	0,10	3	Cyl
• MBTA93060100	6,0	6,0	50,0	18,0	18,0	1,0	3	Cyl
• MBTA93080010	8,0	8,0	63,0	23,0	23,0	0,10	3	Cyl
• MBTA93080100	8,0	6,0	63,0	23,0	23,0	1,0	3	Cyl
• MBTA93080200	8,0	6,0	63,0	23,0	23,0	2,0	3	Cyl
• MBTA93100010	10,0	10,0	72,0	26,0	26,0	0,10	3	Cyl
• MBTA93100100	10,0	6,0	72,0	26,0	26,0	1,0	3	Cyl
• MBTA93100200	10,0	6,0	72,0	26,0	26,0	2,0	3	Cyl
• MBTA93120015	12,0	12,0	83,0	32,0	32,0	0,15	3	Cyl
• MBTA93120100	12,0	6,0	83,0	32,0	32,0	1,0	3	Cyl
• MBTA93120200	12,0	6,0	83,0	32,0	32,0	2,0	3	Cyl
• MBTA93160015	16,0	16,0	108,0	42,0	42,0	0,15	3	Cyl
• MBTA93200020	20,0	20,0	120,0	52,0	52,0	0,20	3	Cyl

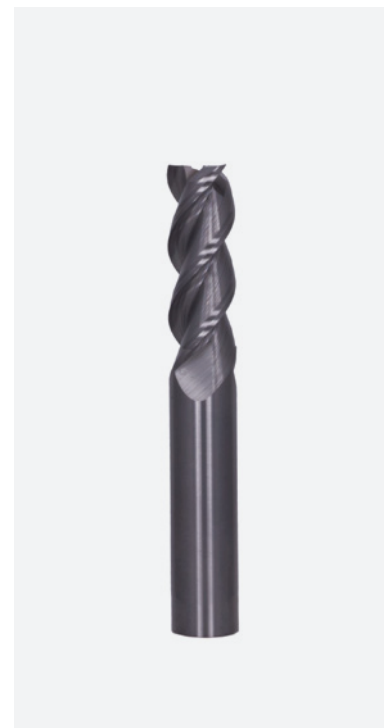

## MBTA93S | SilverTop | Ø6,0-16,0

Art.nr	Ød1e8	Ød2h6	l1	l2	Max ap	rp	z	Info
• MBTA93S060010	6,0	6,0	50,0	18,0	18,0	0,10	3	Cyl ▲
• MBTA93S080010	8,0	8,0	63,0	23,0	23,0	0,10	3	Cyl ▲
• MBTA93S100010	10,0	10,0	72,0	26,0	26,0	0,10	3	Cyl ▲
• MBTA93S120010	12,0	12,0	83,0	32,0	32,0	0,15	3	Cyl ▲
• MBTA93S160010	16,0	16,0	108,0	42,0	42,0	0,15	3	Cyl ▲

SilverTop är en beläggning lämpad främst för >8%Si och gjutna material.

Info om skärdata, se sid 40.

• = Lagervara, ○ = Leveranstid 1-2 arbetsdagar ▲ = New

□ = Mellanliggande diameter eller hörnradie/fas tillverkas vid förfrågan.