
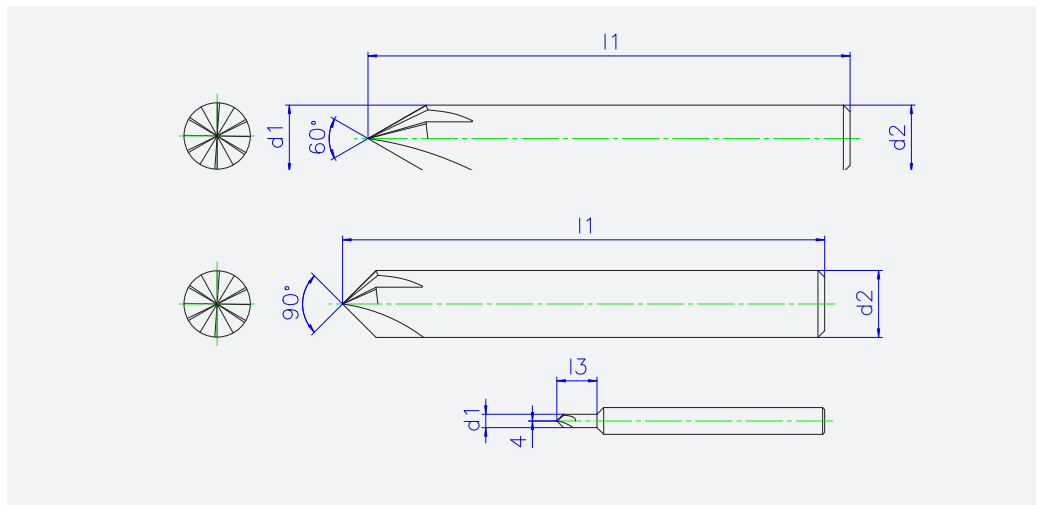


MBTF75 - 60°/90°

Verktyg för fräsning i Stål/Rostfritt/Gjutjärn/Titan/Ni-Co legeringar

- 3 till 8 skärig
- 60°/90°
- Belagd



MBTF75/30 6492 | TiNALOX Thin | 60° | Ø4,0-12,0

Art.nr	Ød1e8	Ød2h6	Ød4	l1	l3	z	Info
• MBTF75040060	4,0	4,0	-	54	-	4	Cyl
• MBTF75060060	6,0	6,0	-	57	-	4	Cyl
• MBTF7506006006	6,0	6,0	-	57	-	6	Cyl
• MBTF75080060	8,0	8,0	-	63	-	5	Cyl
• MBTF7508006006	8,0	8,0	-	63	-	6	Cyl
• MBTF75100060	10,0	10,0	-	72	-	6	Cyl
• MBTF75120060	12,0	12,0	-	83	-	6	Cyl
• MBTF7512006008	12,0	12,0	-	83	-	8	Cyl



MBTF75/30 6493 | TiNALOX Thin | 90° | Ø0,5-12,0

Art.nr	Ød1e8	Ød2h6	Ød4	l1	l3	z	Info
• MBTF75005090	0,5	4,0	0,1	40	3	3	Cyl
• MBTF75010090	1,0	4,0	0,1	40	4	3	Cyl
• MBTF75015090	1,5	4,0	0,1	40	6	3	Cyl
• MBTF75020090	2,0	4,0	0,1	40	6	3	Cyl
• MBTF75025090	2,5	4,0	0,1	40	8	3	Cyl
• MBTF75030090	3,0	4,0	0,1	40	10	3	Cyl
• MBTF75040090	4,0	4,0	-	54	-	4	Cyl
• MBTF75060090	6,0	6,0	-	57	-	4	Cyl
• MBTF7506009006	6,0	6,0	-	57	-	6	Cyl
• MBTF75080090	8,0	8,0	-	63	-	5	Cyl
• MBTF7508009006	8,0	8,0	-	63	-	6	Cyl
• MBTF75100090	10,0	10,0	-	72	-	6	Cyl
• MBTF75120090	12,0	12,0	-	83	-	6	Cyl
• MBTF7512009008	12,0	12,0	-	83	-	8	Cyl



Info om skärdata, se sid 37.

- = Lagervara, ◦ = Leveranstid 1-2 arbetsdagar
- ◻ = Mellanliggande diameter tillverkas vid förfrågan.